
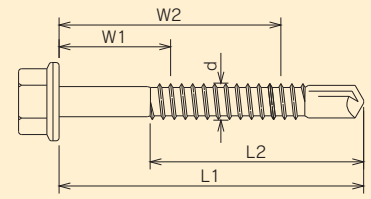



鉄 六角 半ねじ

素材 鉄

表面処理 三価ユニクロ

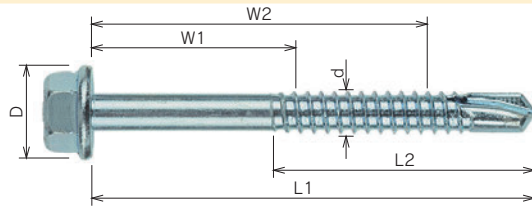


品番	太さ×長さ	ねじピッチ P	ねじ部 L2	働き長さ	ワッシャー径 D	ソケット S	最大板厚 mm	入数	
	d×L1			W1-W2				(本)×(箱)	
HH5045FZ	5×45	1.59	35	14.8-32.2	10.8	8	4.5	200×10	
HH5050FZ	5×50	1.59	35	19.8-37.2	10.8	8	4.5	200×10	
HH5065FZ	5×65	1.59	40	29.8-52.2	10.8	8	4.5	150×10	
HH5075FZ	5×75	1.59	45	34.8-62.2	10.8	8	4.5	150×10	
HH6045FZ	6×45	1.81	35	15.5-30.5	12.8	9.6	6.5	150×10	
HH6050FZ	6×50	1.81	35	20.5-35.5	12.8	9.6	6.5	150×10	
HH6060FZ	6×60	1.81	35	30.5-45.5	12.8	9.6	6.5	100×10	
HH6070FZ	6×70	1.81	40	35.5-55.5	12.8	9.6	6.5	100×10	
HH6080FZ	6×80	1.81	45	40.5-65.5	12.8	9.6	6.5	100×10	
HH6090FZ	6×90	1.81	50	45.5-75.5	12.8	9.6	6.5	80×10	
HH6105FZ	6×105	1.81	60	50.5-90.5	12.8	9.6	6.5	150×5	
HH6115FZ	6×115	1.81	65	55.5-100.5	12.8	9.6	6.5	150×5	
HH6135FZ	6×135	1.81	65	75.5-120.5	12.8	9.6	6.5	150×5	
HH6150FZ	6×150	1.81	65	90.5-135.5	12.8	9.6	6.5	150×5	

単位:mm



SUS410 六角 全ねじ

素材 SUS410

表面処理 パシペート



L1=L2






品番	太さ×長さ	ねじピッチ P	ねじ部 L2	働き長さ	ワッシャー径 D	ソケット S	最大板厚 mm	入数	
	d×L1			W2				(本)×(箱)	
HZ5016SP	5×16	1.59	全ねじ	5.2	10.8	8	4.0	500×10	
HZ5019SP	5×19	1.59	全ねじ	7.2	10.8	8	4.0	500×10	
HZ5025SP	5×25	1.59	全ねじ	13.2	10.8	8	4.0	400×10	
HZ5035SP	5×35	1.59	全ねじ	23.2	10.8	8	4.0	300×10	
HZ6019SP	6×19	1.81	全ねじ	5.0	12.8	9.6	5.0	300×10	
HZ6025SP	6×25	1.81	全ねじ	10.8	12.8	9.6	6.0	250×10	
HZ6035SP	6×35	1.81	全ねじ	20.8	12.8	9.6	6.0	200×10	

単位:mm

SUS410 六角 半ねじ

素材 SUS410

表面処理 パシペート

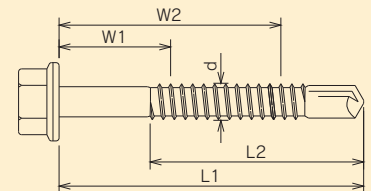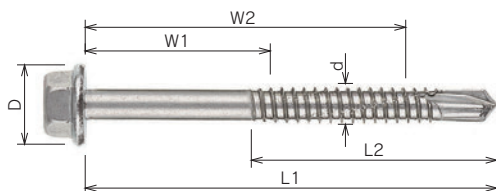

品番	太さ×長さ	ねじピッチ P	ねじ部 L2	働き長さ	ワッシャー径 D	ソケット S	最大板厚 mm	入数	
	d×L1			W1-W2				(本)×(箱)	
HH5045SP	5×45	1.59	35	14.8-32.2	10.8	8	4.5	200×10	
HH6045SP	6×45	1.81	35	15.5-30.5	12.8	9.6	6.5	150×10	
HH6050SP	6×50	1.81	35	20.5-35.5	12.8	9.6	6.5	150×10	
HH6060SP	6×60	1.81	35	30.5-45.5	12.8	9.6	6.5	100×10	
HH6070SP	6×70	1.81	40	35.5-55.5	12.8	9.6	6.5	100×10	
NEW HH6080SP	6×80	1.81	45	40.5-65.5	12.8	9.6	6.5	100×10	
NEW HH6090SP	6×90	1.81	50	45.5-75.5	12.8	9.6	6.5	80×10	

単位:mm